

300 kVA Generator

Model – Fusteq FQ330SV

DATA SHEET – ORDER CODE – GEN/V

TEMPLANT

Rental Power

TECHNICAL DATA

Electrical

Prime

kVA	(50Hz) 300	(60Hz) 305
kW	(50Hz) 240	(60Hz) 244

Standby

kVA	(50Hz) 330	(60Hz) 335
kW	(50Hz) 264	(60Hz) 268

Phases	3	
Voltage	(50Hz) 415/240V	(60Hz) 415/240V
Rated Speed RPM	(50Hz) 1500	(60Hz) 1800
Generator Size (Amps)	418	
Circuit Breaker Output	630 AMP 4 Pole MCCB Motorized	
Outgoing Connection	Busbar	

Engine

Manufacturer and Model	SCANIA DC09320A0263
Engine Speed	1500
Cylinders	5
Exhaust emission aftertreatment	DOC/DPF/SCR/CUC
Emission Standard	Stage V
Sound Level dBa 7m	67

Alternator

Model	LEROY SOMER LSA46.3M8
-------	-----------------------


Weight With Fluids Except Fuel	4860
Weight With Fuel (Kg)	6648

Fuel

75% load Prime (L/h)	46.2
Fuel Tank (L)	2000

DEF System

75% load Prime 1500 rpm (l/h)	4.6
Adblue Tank (L)	80

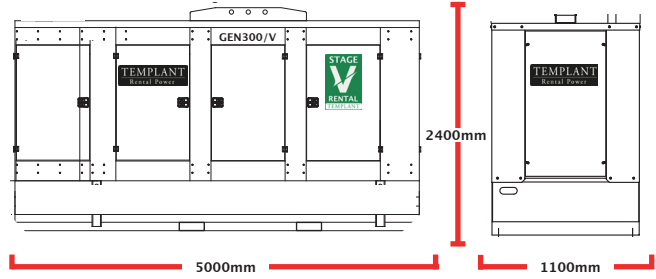

KEY FEATURES

Stage V Emission Technology ✓

Lifting Point Lift ✓

Fork Truck Pockets ✓

RCD Protection ✓

Auto Start ✓

DSE Remote Monitoring ✓



HYBRID SYSTEM SETUP



Our hybrid energy storage systems optimize operations, reduce emissions, and provide critical backup power for sites. Ideal for various sectors, they adapt to fluctuating peak loads, saving on fuel costs and ensuring uninterrupted operation.



Remote Monitoring

The DSE WebNet Gateway is used in conjunction with supported DSE controllers to provide remote monitoring and communication data.



WE OPERATE 24 HOURS A DAY 365 DAYS A YEAR

Emergency Phone 0333 240 0872



Registered in England No. 3454838
VAT Reg No. 649057415
Est. 1989

Templant Hire Ltd
Chelmsford
Essex CM1 3PT

0333 240 0872
rental@templant.co.uk
www.templant.co.uk