

1250 kVA Generator

Model – Bruno FQ1400C

DATA SHEET – ORDER CODE – GEN/1250/F

TEMPLANT

Rental Power

TECHNICAL DATA

Electrical

Prime

kVA 1250
kW 1000

Standby

kVA 1375
kW 1100
Phases 3 + N
Voltage (50Hz) 400
Rated Speed RPM (50Hz) 1500
Generator Size (Amps) 1803
Circuit Breaker Output 2000 AMP 4 Pole MCCB Motorized
Outgoing Connection Power Lock Source
Busbar

Engine

Manufacturer and Model CUMMINS KTA503 G3
Engine Speed 1500
Cylinders 16
Exhaust emission after treatment N/A
Emission Standard N/A
Sound Level dBa 7m 62

Alternator

Model Leroy Somer 50.1M7/1325

Weight

Weight With Fluids Except Fuel 17160
Weight With Fuel (Kg) 19500

Fuel

75% load Prime (L/h) (50Hz) 180
Fuel Tank (L) 2000

Control Module


Controller Model DSE8610 MKII



Remote Monitoring



The DSE WebNet Gateway is used in conjunction with supported DSE controllers to provide remote monitoring and communication data.

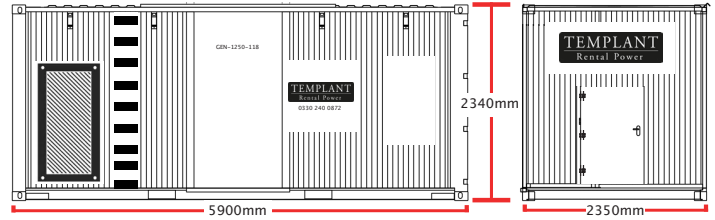

KEY FEATURES

- Option Synchronized ✓
- Option Load Share ✓
- Supplied With 40ft Trailer ✓
- DSE Remote Monitoring ✓
- CSC Safety Approved (International Convention for Safe Containers) ✓
- 4-Point Lifting on ISO Corner Castings ✓



50Hz or 60Hz

For a bit more versatility, we also provide this generator with options for either 50Hz or 60Hz. Feel free to reach out to one of our team members for additional detail.



**WE OPERATE 24 HOURS A DAY
365 DAYS A YEAR**
Emergency Phone 0333 240 0872



Registered in England No. 3454838
VAT Reg No. 649057415
Est. 1989

Templant Hire Ltd
Chelmsford
Essex CM1 3PT

0333 240 0872
rental@templant.co.uk
www.templant.co.uk