

150 kVA Generator Model – Bruno GX1181F

DATA SHEET – ORDER CODE – GEN/150

TEMPLANT Rental Power

TECHNICAL DATA

Electrical

Prime

kVA	(50Hz) 150	(60Hz) 150
kW	(50Hz) 120	(60Hz) 120

Standby

kVA	(50Hz) 165	(60Hz) 165
kW	(50Hz) 132	(60Hz) 132
Phases	3	
Voltage	(50Hz) 415/240V	(60Hz) 415/240V
Rated Speed RPM	(50Hz) 1500	(60Hz) 1800
Generator Size (Amps)	250	
Circuit Breaker Output	400 AMP 4P MCCB Motorized	
Outgoing Connection	Busbar	

Engine

Manufacturer and Model	FPT NEF67TE1F	
Engine Speed	(50Hz) 1500	(60Hz) 1800
Cylinders	6	
Exhaust emission after treatment	N/A	
Emission Standard	Stage 3	
Sound Level dBa 7m	(50Hz) 68	


Alternator

Model	MECC ALTE ECP34-2L
-------	--------------------

Weight With Fluids Except Fuel	2300
Weight With Fuel (Kg)	2500

Fuel

75% load Prime (L/h)	(50Hz) 27	(60Hz) 33
Fuel Tank (L)	185	

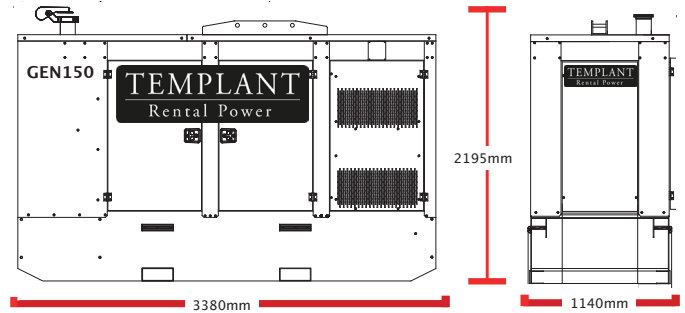

KEY FEATURES

- Lifting Point Lift ✓
- Fork Truck Pockets ✓
- RCD Protection ✓
- Auto Start ✓
- DSE Remote Monitoring ✓
- Synchronised Option ✓

50Hz or 60Hz

For a bit more versatility, we also provide this generator with options for either 50Hz or 60Hz. Feel free to reach out to one of our team members for additional detail.



Remote Monitoring

The DSE WebNet Gateway is used in conjunction with supported DSE controllers to provide remote monitoring and communication data.



**WE OPERATE 24 HOURS A DAY
365 DAYS A YEAR**
Emergency Phone 0333 240 0872



Registered in England No. 3454838
VAT Reg No. 649057415
Est. 1989

Templant Hire Ltd
Chelmsford
Essex CM1 3PT

0333 240 0872
rental@templant.co.uk
www.templant.co.uk